

PERI Proform EV

Formwork Panel

Panel construction

Rubber, Acacia, Eucalyptus, Engineered Veneers

Coating and edges


Panel is constructed with 130 g/m² Phenolic Surface Film on both sides. Edges are sealed. Three times hot pressed. Phenolic Glue. No logo.

Bonding

Weather & Boil Proof-WBP (Class 3)

Application

Formwork panel for a smooth gloss finish. High number of resuses.

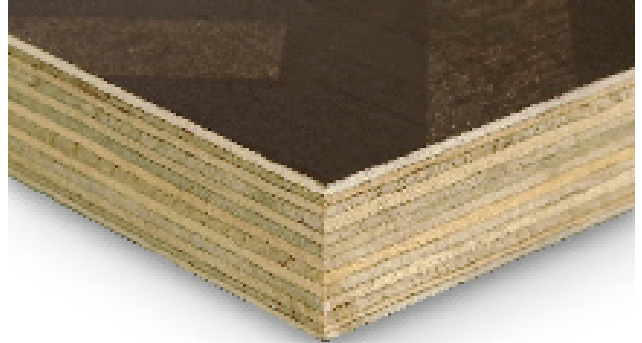

Uniform Loads (PSF) LB 12.7 mm PERI Proform | 250497

Name	Load Governed By	Face Grain Across Supports Span, Center-to-Center of Supports (Inches)									
		12	16	19.2	24	30	32	36	40	48	60
Single Span	L/360	184	78	45	23	12	10	7	5	3	1
	L/240	276	116	67	34	18	15	10	7	4	2
	L/180	367	155	90	46	24	19	14	10	6	3
	Bending	1800	1013	703	450	288	253	200	162	113	72
Double Span	L/360	443	187	108	55	28	23	16	12	7	4
	L/240	664	280	162	83	42	35	25	18	10	5
	L/180	885	373	216	111	57	47	33	24	14	7
	Bending	1800	1013	703	450	288	253	200	162	113	72
Triple Span	L/360	347	147	85	43	22	18	13	9	5	3
	L/240	521	220	127	65	33	27	19	14	8	4
	L/180	695	293	170	87	44	37	26	19	11	6
	Bending	2250	1266	879	563	360	316	250	203	141	90
Name	Load Governed By	Face Grain Parallel to Supports Span, Center-to-Center of Supports (Inches)									
		12	16	19.2	24						
Single Span	L/360	127	54	31	16						
	L/240	191	81	47	24						
	L/180	255	108	62	32						
	Bending	1360	765	531	340						
Double Span	L/360	307	129	75	38						
	L/240	460	194	112	58						
	L/180	614	259	150	77						
	Bending	1360	765	531	340						
Triple Span	L/360	241	102	59	30						
	L/240	361	152	88	45						
	L/180	482	203	118	60						
	Bending	1700	956	664	425						



PERI Formwork Systems Inc.
Formwork Scaffolding Engineering
7135 Dorsey Run Rd
Elkridge MD 21075
Tel. (410) 712-7225
Fax (410) 796-8683
www.peri-usa.com

Tony Heyward
Panel Manager
Tel. (267) 524-6288
Tony.Heyward@peri-usa.com